


PROBLEM 3.117

KNOWN: Dimensions of disc/shaft assembly. Applied angular velocity, force, and torque. Thermal conductivity and inner temperature of disc.

FIND: (a) Expression for the friction coefficient μ , (b) Radial temperature distribution in disc, (c) Value of μ for prescribed conditions.

SCHEMATIC:

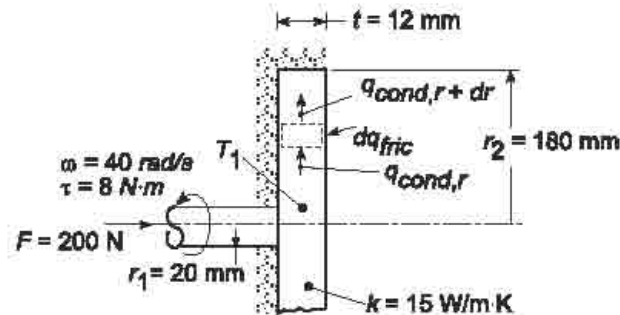

ASSUMPTIONS: (1) Steady-state conditions, (2) One-dimensional radial conduction, (3) Constant k , (4) Uniform disc contact pressure p , (5) All frictional heat dissipation is transferred to shaft from base of disc.

ANALYSIS: (a) The normal force acting on a differential ring extending from r to $r+dr$ on the contact surface of the disc may be expressed as $dF_n = p2\pi r dr$. Hence, the tangential force is $dF_t = \mu p 2\pi r dr$, in which case the torque may be expressed as

$$d\tau = 2\pi\mu p r^2 dr$$

For the entire disc, it follows that

$$\tau = 2\pi\mu p \int_0^{r_2} r^2 dr = \frac{2\pi}{3} \mu p r_2^3$$

where $p = F/\pi r_2^2$. Hence,

$$\mu = \frac{3}{2} \frac{\tau}{F r_2} \quad <$$

(b) Performing an energy balance on a differential control volume in the disc, it follows that

$$q_{cond,r} + dq_{fric} - q_{cond,r+dr} = 0$$

With $dq_{fric} = \omega d\tau = 2\mu F \omega \left(r^2/r_2^2 \right) dr$, $q_{cond,r+dr} = q_{cond,r} + (dq_{cond,r}/dr) dr$, and

$q_{cond,r} = -k(2\pi r t) dT/dr$, it follows that

$$2\mu F \omega \left(r^2/r_2^2 \right) dr + 2\pi k t \frac{d(rdT/dr)}{dr} dr = 0$$

or

$$\frac{d(rdT/dr)}{dr} = -\frac{\mu F \omega}{\pi k t r_2^2} r^2$$

Integrating twice,

Continued...

PROBLEM 3.117 (Cont.)

$$\frac{dT}{dr} = -\frac{\mu F \omega}{3\pi k r_2^2} r^2 + \frac{C_1}{r}$$

$$T = -\frac{\mu F \omega}{9\pi k r_2^2} r^3 + C_1 \ln r + C_2$$

Since the disc is well insulated at $r = r_2$, $dT/dr|_{r_2} = 0$ and

$$C_1 = \frac{\mu F \omega r_2}{3\pi k t}$$

With $T(r_1) = T_1$, it also follows that

$$C_2 = T_1 + \frac{\mu F \omega}{9\pi k r_2^2} r_1^3 - C_1 \ln r_1$$

Hence,

$$T(r) = T_1 - \frac{\mu F \omega}{9\pi k r_2^2} (r^3 - r_1^3) + \frac{\mu F \omega r_2}{3\pi k t} \ln \frac{r}{r_1} \quad <$$

(c) For the prescribed conditions,

$$\mu = \frac{3}{2} \frac{8 \text{ N} \cdot \text{m}}{200 \text{ N} (0.18 \text{ m})} = 0.333 \quad <$$

Since the maximum temperature occurs at $r = r_2$,

$$T_{\max} = T(r_2) = T_1 - \frac{\mu F \omega r_2}{9\pi k t} \left[1 - \left(\frac{r_1}{r_2} \right)^3 \right] + \frac{\mu F \omega r_2}{3\pi k t} \ln \left(\frac{r_2}{r_1} \right)$$

With $(\mu F \omega r_2 / 3\pi k t) = (0.333 \times 200 \text{ N} \times 40 \text{ rad/s} \times 0.18 \text{ m} / 3\pi \times 15 \text{ W/m} \cdot \text{K} \times 0.012 \text{ m}) = 282.7^\circ \text{C}$,

$$T_{\max} = 80^\circ \text{C} - \frac{282.7^\circ \text{C}}{3} \left[1 - \left(\frac{0.02}{0.18} \right)^3 \right] + 282.7^\circ \text{C} \ln \left(\frac{0.18}{0.02} \right)$$

$$T_{\max} = 80^\circ \text{C} - 94.1^\circ \text{C} + 621.1^\circ \text{C} = 607^\circ \text{C} \quad <$$

COMMENTS: The maximum temperature is excessive, and the disks should be actively cooled (by convection) at their outer surfaces.