


PROBLEM 6.20

KNOWN: Experimental measurements of the heat transfer coefficient for a square bar in cross flow.

FIND: (a) $\bar{h}$ for the condition when $L = 1\text{m}$ and $V = 15\text{m/s}$, (b) $\bar{h}$ for the condition when $L = 1\text{m}$ and $V = 30\text{m/s}$, (c) Effect of defining a side as the characteristic length.

SCHEMATIC:

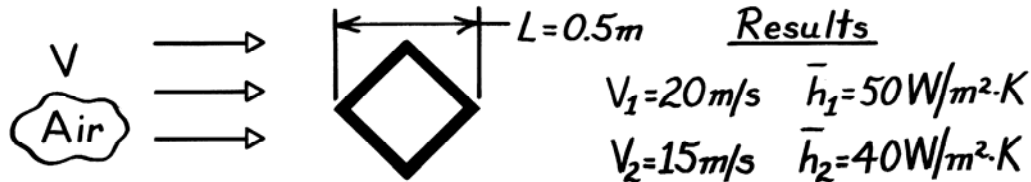

ASSUMPTIONS: (1) Functional form $\overline{\text{Nu}} = C\text{Re}^m\text{Pr}^n$ applies with C , m , n being constants, (2) Constant properties.

ANALYSIS: (a) For the experiments and the condition $L = 1\text{m}$ and $V = 15\text{m/s}$, it follows that Pr as well as C , m , and n are constants. Hence

$$\bar{h}L \propto (VL)^m.$$

Using the experimental results, find m . Substituting values

$$\frac{\bar{h}_1 L_1}{\bar{h}_2 L_2} = \left[\frac{V_1 L_1}{V_2 L_2} \right]^m \quad \frac{50 \times 0.5}{40 \times 0.5} = \left[\frac{20 \times 0.5}{15 \times 0.5} \right]^m$$

giving $m = 0.782$. It follows then for $L = 1\text{m}$ and $V = 15\text{m/s}$,

$$\bar{h} = \bar{h}_1 \frac{L_1}{L} \left[\frac{V \cdot L}{V_1 \cdot L_1} \right]^m = 50 \frac{\text{W}}{\text{m}^2 \cdot \text{K}} \times \frac{0.5}{1.0} \left[\frac{15 \times 1.0}{20 \times 0.5} \right]^{0.782} = 34.3 \text{W/m}^2 \cdot \text{K}. \quad <$$

(b) For the condition $L = 1\text{m}$ and $V = 30\text{m/s}$, find

$$\bar{h} = \bar{h}_1 \frac{L_1}{L} \left[\frac{V \cdot L}{V_1 \cdot L_1} \right]^m = 50 \frac{\text{W}}{\text{m}^2 \cdot \text{K}} \times \frac{0.5}{1.0} \left[\frac{30 \times 1.0}{20 \times 0.5} \right]^{0.782} = 59.0 \text{W/m}^2 \cdot \text{K}. \quad <$$

(c) If the characteristic length were chosen as a side rather than the diagonal, the value of C would change. However, the coefficients m and n would not change.

COMMENTS: The foregoing Nusselt number relation is used frequently in heat transfer analysis, providing appropriate scaling for the effects of length, velocity, and fluid properties on the heat transfer coefficient.